




EBP50 Ever-Brite Series



PROJECT: _____
 FIXTURE TYPE: _____
 LOCATION: _____
 CONTACT/PHONE: _____

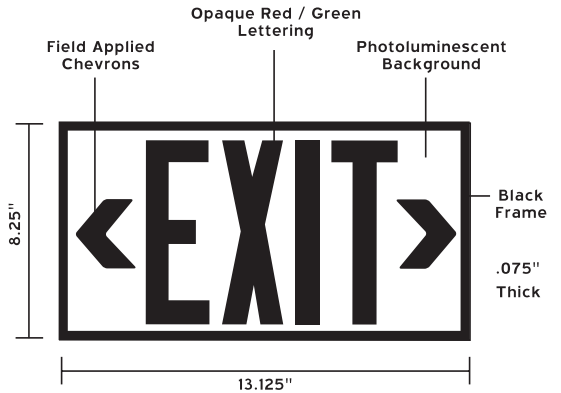

PRODUCT FEATURES

- Requires no additional electricity to operate
- Reliability
- Non-toxic, non-radioactive
- Low-cost, easy installation
- Designed for surface, flag or ceiling mounting
- Can be used for both high-level and low-level applications
- Requires virtually no maintenance, periodic inspections, for 25+ years
- Thin, low profile construction
- Consistent, uniform illumination
- Visible at 50 feet
- Saves on energy costs

PRODUCT SPECIFICS

TECHNICAL INFORMATION:

Sizes: 7.5" x 13" x 0.075"
 Letter size: 0.8125" stroke with 6" height
 Background: Photoluminescent
 Illumination: High Visibility Green
 Visibility: 50 feet
 Directional: 2 included (Field Applied)
 Construction: Plastic photoluminescent panel/red or green lettering with black plastic frame
 Durability: Explosion-proof for areas requiring explosion-proof exit signage

TESTS PASSED:

UL 924 Emergency Lighting and Power Equipment Listed through UL; ICC ES # 6040, meeting all current building codes, meets NFPA Life Safety Code 101 and OSHA requirements; California State Fire Marshal listing #6200-1617:100; City of Los Angeles Research Report: RR 25531 (CSI #16530); Ontario Building Material Evaluation Commission Authorization Report BMEC #03-12-291; CCMC Evaluation Report CCMC 13211-R National Research Council Canada

LIFE EXPECTANCY:

25+ years

POWER REQUIREMENTS:

NO additional electrical or mechanical source required

INSTALLATION:

Surface mounted Before installation it must be determined that there is a minimum of 5 Fc of fluorescent, metal halide or mercury vapor light on the face(s) of the sign at all times during building occupancy.

APPLICATIONS:

Both high-level and low-level



ORDERING INFORMATION

MODEL	FACES	LETTER COLOR	LETTER STYLE
EBP50	1 = Single Face	R = Red G = Green	P = Printed Letters R = Reflective Letters

Ordering Example: EBP50-1-P-R