



Precision ELX Series

SPECIFICATION GRADE EDGE-LIT LED EXIT



PROJECT: _____
 FIXTURE TYPE: _____
 LOCATION: _____
 CONTACT/PHONE: _____

PRODUCT DESCRIPTION

The Precision Series LED edge-lit signs combine a distinctive look with energy efficient LED technology. Ideal for new construction, renovation and remodeling projects. Providing a high quality and distinguished design, the Precision Series LED edge-lit sign is the fixture of choice whenever elegance and exceptional performance are demanded from the same fixture. These stylish, low-profile panel signs are illuminated with red or green super bright LEDs.

PRODUCT SPECIFICATIONS

CONSTRUCTION

Surface Mounting: Engineering grade aluminum extrusion with mounting canopy • Recessed Mounting: Extruded aluminum housing supplied with galvanized steel adjustable bar hanger assembly • Panels - Constructed of high quality, optically true, clear acrylic with beveled lettering for maximum light output • 6" letters with 3/4" stroke width • Field-applied chevron directional indicators with pre-applied, easily removable installation template • Red or Green letters •

ELECTRICAL

Dual voltage 120/277VAC @ 60Hz • Brownout circuit monitors the flow of AC current • Low voltage disconnect eliminates deep discharge • Solid-state transfer switch • AC Indicator light • Test switch •

LAMPS

Ngpi 'Htg."gpgti { 'ucxkpi 'NGF 'rco r u'ÉT gf 'qt'Gtggp'NGF lrgwtu'ÉUki pu'eqpuwo g'rguu' yj cp'6'y cwu0

BATTERY

Sealed, 4.8V maintenance-free nickel cadmium • Battery will operate sign for a minimum of 90 minutes in the event of a power outage. • Temperature rating is 0-50 degrees C.

CODE COMPLIANCE

ETL LisTed to UN; 46'ÉF co r 'hjecvqp'tcvgf 'ÉP HRC'323'Nktg'Uchgv{ 'Eqf g" eqo r r'cpv'ÉP GE'cpf "QUJ C"eqo r r'cpv0

WARRANTY

5-year warranty. Product specifications subject to change without notice.

INSTALLATION

MOUNTING

Recessed and surface mount - Ceiling or wall mount • Recessed includes telescoping bar hangers for joist or T-bar ceiling applications • Vertically adjustable to accommodate varying ceiling thickness • Can be installed in drywall or suspended ceilings • Surface includes mounting canopy for ceiling, wall or end mount •


ORDERING INFORMATION

model	faces	operation	letter/panel	mounting	housing color	options
ELX	1 = Single	A = AC Only	RC = Red on Clear	R = Ceiling Recessed	WH = White	SD ¹ = Self-Diagnostics
	2 = Double	B = Battery Backup	GC = Green on Clear	U = Surface Ceiling, End or Wall Mount	BL = Black BA = Brushed Aluminum	DLC1 ² = 2 Circuit Input 120/120 DLC2 ² = 2 Circuit Input 277/277V
Notes			RM = Red on Mirror			FL = Flasher
			GM = Green on Mirror			BZ = Buzzer
			RW = Red on White			FAI = Fire Alarm Interface
			GW = Green on White			SL = Special Lettering
						DR = Damp Rated
						WR = Wall recessed


¹ Not available on AC units

² AC only, use with inverter or generator applications only

³ Order as separate line item. Field installation

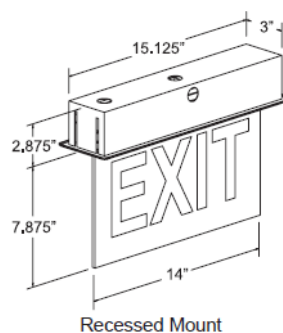

Recessed Mount

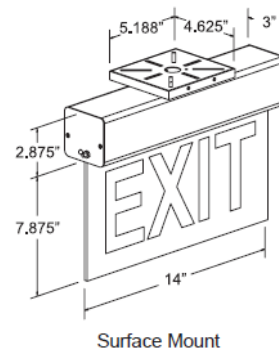

Surface Mount

ACCESSORIES³

ACCESSORY	DESCRIPTION
PKELX1	1ft Pendant Mount Kit
PKELX2	2ft Pendant Mount Kit



Ordering Example: ELX-1-B-RC-R-BA-SD