

DIE-CAST ALUMINUM LED EXIT

With a rugged specification grade die cast aluminum frame and architecturally pleasing design, the Classic Series will complement virtually any decor. Designed for commercial, industrial and institutional facilities where appearance, low maintenance and ease of installation are important. Available with red or green energy efficient LED light sources to provide years of maintenance-free illumination at a minimal cost.



BENEFITS & FEATURES

ALL MODELS


- Rugged vandal resistant construction
- Diffused Super-bright LEDs – Red or Green
- Even illumination – no hot spots
- Dual voltage 120/277 standard
- Eliminates maintenance – no more lamp changes
- Same compact frame for AC and Self-Powered models
- Universal ceiling, end or surface mount
- Universal chevron knockouts
- ETL listed
- Meets NFPA 101, NEC, OSHA
- 5 Year Limited Warranty

AC ONLY MODELS

- Total power consumption under 2 watts

SELF-POWERED MODELS

- Total power consumption under 5 watts
- Sealed maintenance-free nickel cadmium battery
- Solid state charger
- Low voltage disconnect & brownout protection
- LED AC pilot and “Ready” indicator monitors charging status
- Push-to-test switch

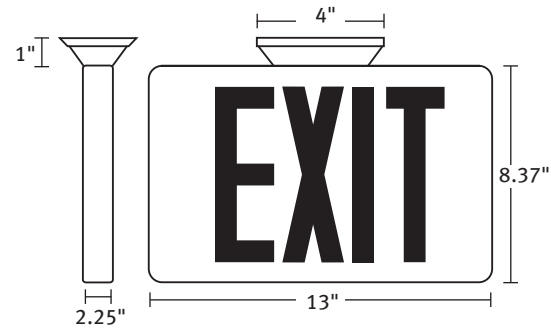

ACCESSORIES

| ACCESSORY | DESCRIPTION |
|-----------|--------------------------------------|
| WG2 | Wire Guard |
| VRS | Vandal Resistant Shield - Wall Mount |
| VRL | Vandal Resistant Lens |

Add suffix to model or order separately

ORDERING INFORMATION

| MODEL | # OF FACES | COLOR CODE | OPTIONS |
|-----------------------|------------|---|--|
| AC Only | 1 = Single | BAR = Red Letters, Black Housing, Brushed Aluminum Face | FL = Flasher |
| CX | 2 = Double | BAG = Green Letters, Black Housing, Brushed Aluminum Face | BZ = Buzzer |
| Battery Backup | | BBR = Red Letters, Black Housing, Black Face | FAI = Fire Alarm Interface |
| PCX | | BBG = Green Letters, Black Housing, Black Face | SL = Special Lettering |
| | | WWR = Red Letters, White Housing, White Face | DR = Damp Rated |
| | | WWG = Green Letters, White Housing, White Face | ERT = Extended Run Time |
| | | | DLC = Dual Circuit |
| | | | SD = Self-Diagnostics |
| | | | RMK = Recessed Mounting Kit |
| | | | LLE = Low-level matching exit for master/slave setup |

Ordering Example: PCX-1-BAR-WG2