




**MRHLED**  
LED OUTDOOR POLYCARBONATE REMOTE HEAD



PROJECT: \_\_\_\_\_  
 FIXTURE TYPE: \_\_\_\_\_  
 LOCATION: \_\_\_\_\_  
 CONTACT/PHONE: \_\_\_\_\_



**DIMENSIONS**

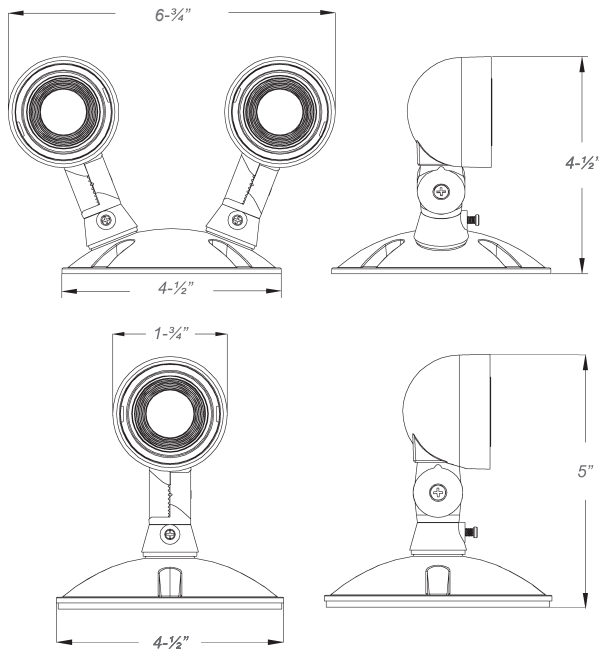

**ILLUMINATION**

- Long lasting, efficient, ultra bright white LED lamp heads.
- 0.5 watt (1 LEDs x 0.5 watt) per head.
- Unique all-inclusive lamp, diffuser and lens assembly.
- Adjustable LED lamp heads provide optimal center-to-center spacing.

**ELECTRICAL**

- Powered from low voltage power source with low voltage wiring (not provided).

**HOUSING**

- Engineering grade, high-impact resistant polycarbonate housing.
- Sealed and gasketed in standard gray or black finish.

**MOUNTING**

- Universal mounting adapter plate included. Mounts to single-gang switch box.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.
- Suitable for wall or ceiling mount.

**WARRANTY & LISTING**

- Five year warranty.
- cULus Listed for wet locations (-30°C - 50°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

**FIXTURE COMPATIBILITY CHART**

Reference individual unit equipment specification sheets for remote load capacity availability.

Mule Lighting Model Type		
CEU-RC	MDC-REM	EM-USA-RC
CEM-USA-RC	E-1-RC	UXC-REM

**ORDERING INFORMATION**

Model	No. of Heads	Color	Housing	Voltage
MRHLED	1 = Single Head	(blank) = Grey	PWP = Thermoplastic	3.6V = For Use With 3.6V
	2 = Double Head	B = Black		DC Power Source

Ordering Example: MRHLED-1-PWP-3.6V